

TECTA D280i WH

Item no.: 1010110



Presence and motion detectors Wall installation outdoor

Description

- Passive infra-red motion detector for wall installation
- 280° detection angle, Ø 24 m
- Detection area digitally adjustable via app, no mechanical adjustment necessary
- Mode selection: Automatic / permanent light / D-MODE
- Can be linked in groups
- Adjustable brightness switching value and switch-off delay
- Area limit via lens attachment
- Mixed light measurement suitable for the control of fluorescent, incandescent, halogen lamps and LEDs
- Zero-cross switching for relay-saving switching and high lamp loads
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset



Technical data

TECTA D280i WH	
Operating voltage	230 V AC
Frequency	50 Hz
Stand-by consumption	<0,4 W
Light measurement	Mixed light measurement
Number of channels	1
Colour	White (similar RAL 9010)
Switching output	Light
Installation type	Wall installation, Surface mounted
Switching capacity	10 A at 230 V AC, $\cos \varphi = 1$
Detection angle	280° horizontally 79,6 ° vertically
Light switch-off delay	5 s - 30 min
Incandescent/halogen lamp load	2300 W
Energy saving lamps	150 W
LED lamp 2-8 W	600 W


TECTA D280i WH	
LED lamp > 8 W	600 W
Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Detection range	Ø 24 m
Detection range	Round
Remote controlled	✓
Ambient temperature	-25°C ... 55°C
Protection class	II
Type of protection	IP 55
GWP Cradle-to-Gate (A1-A3)	6.68 kg CO ₂ eq
GWP Cradle-to-Grave (A1-C4)	20.06 kg CO ₂ eq

Subject to technical changes and misprints

additional information at: www.theben.de/product/1010110


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

Connection example



Detection range for planning applications at a temperature of 21 °C

Mounting height	Diagonally (t)	Head on to (r)	
2,5 m	12 m	5 m	
3 m	16 m	6 m	
3,5 m	16 m	6 m	
4 m	18 m	7 m	
4,5 m	20 m	7 m	
5 m	22 m	7 m	
6 m	25 m	10 m	

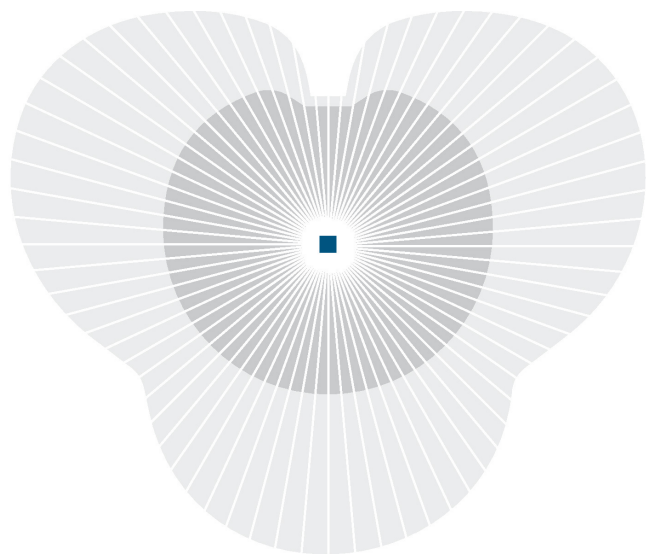

sens NORM
certified




TECTA D280i WH

Item no.: 1010110

theben

Scale drawings

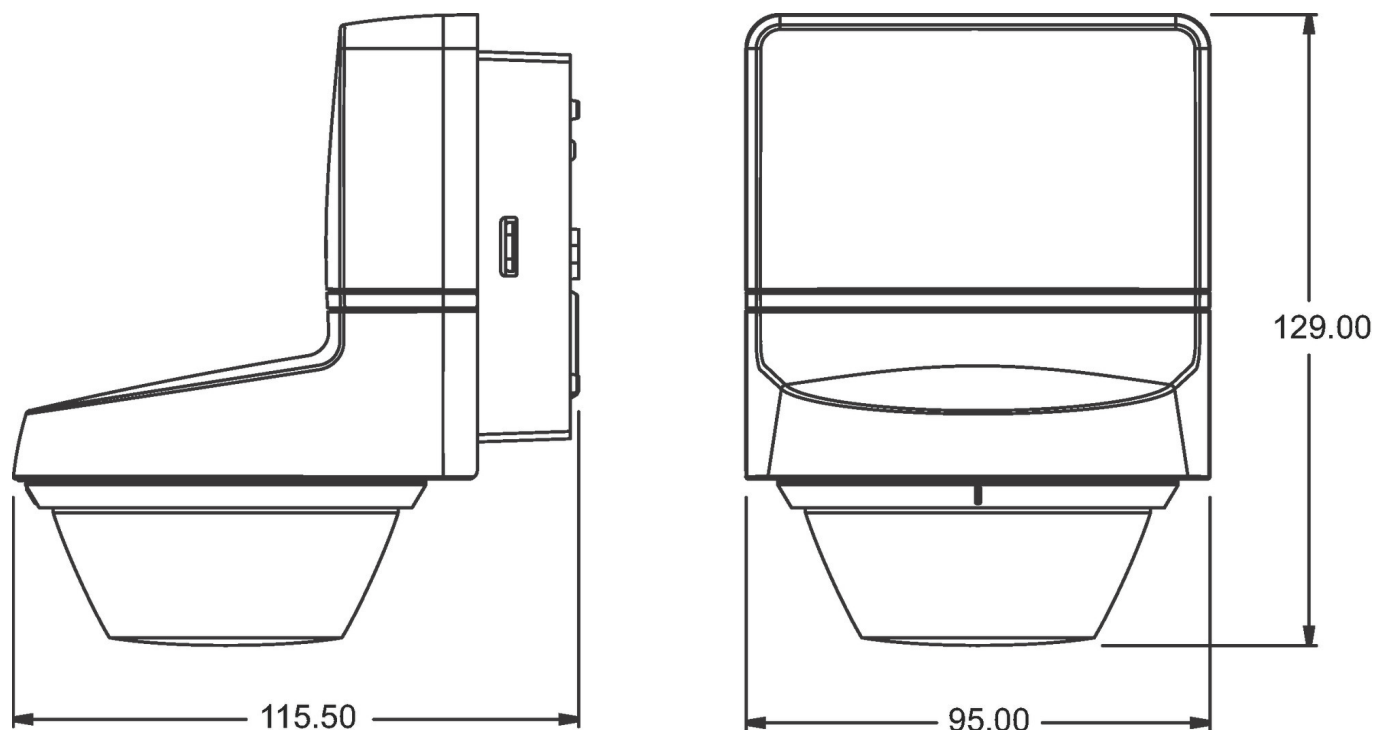

Accessories

Corner angle 10 WH

Item no.: 9070969



Spacer 10 WH

Item no.: 9070971



Subject to technical changes and misprints

additional information at: www.theben.de/product/1010110

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

05/08/2026

Page 3 of 3