

Line coupler Sec KNX


Item no.: 9080048



KNX
System devices and sets

Description

- Area coupler for connecting the KNX backbone (main line) to an area line (subline)
- Line coupler for connecting an area line (main line) to a line (subline)
- Segment coupler for extending a line (main line) with additional segments (subline) only available with ETS 6
- Filter functions for group telegrams and physically addressed telegrams can be configured
- Filtering, forwarding and blocking of encrypted and unencrypted telegrams regardless of commissioning as a KNX Data Secure product
- Secure proxy for secure data exchange between secure devices and devices that are not secured via KNX Secure, only available with ETS 6
- Project planning and commissioning of the device from ETS 4 onwards when used as an area coupler, line coupler or line amplifier. With ETS 6 (recommendation from 6.1.0 onwards), additional use as a segment coupler and use of the Secure Proxy

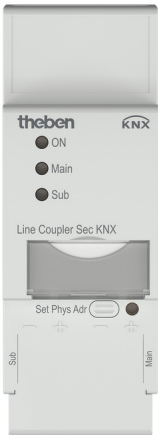

Technical data

Line coupler Sec KNX	
Operating voltage KNX	Busspannung, ≤10 mA
Operating voltage	24 V DC
Width	2 modules
Installation type	DIN rail


Line coupler Sec KNX	
Type of connection	KNX bus terminal
Protection class	III
Type of protection	IP 20

Line coupler Sec KNX

Item no.: 9080048

theben

Scale drawings

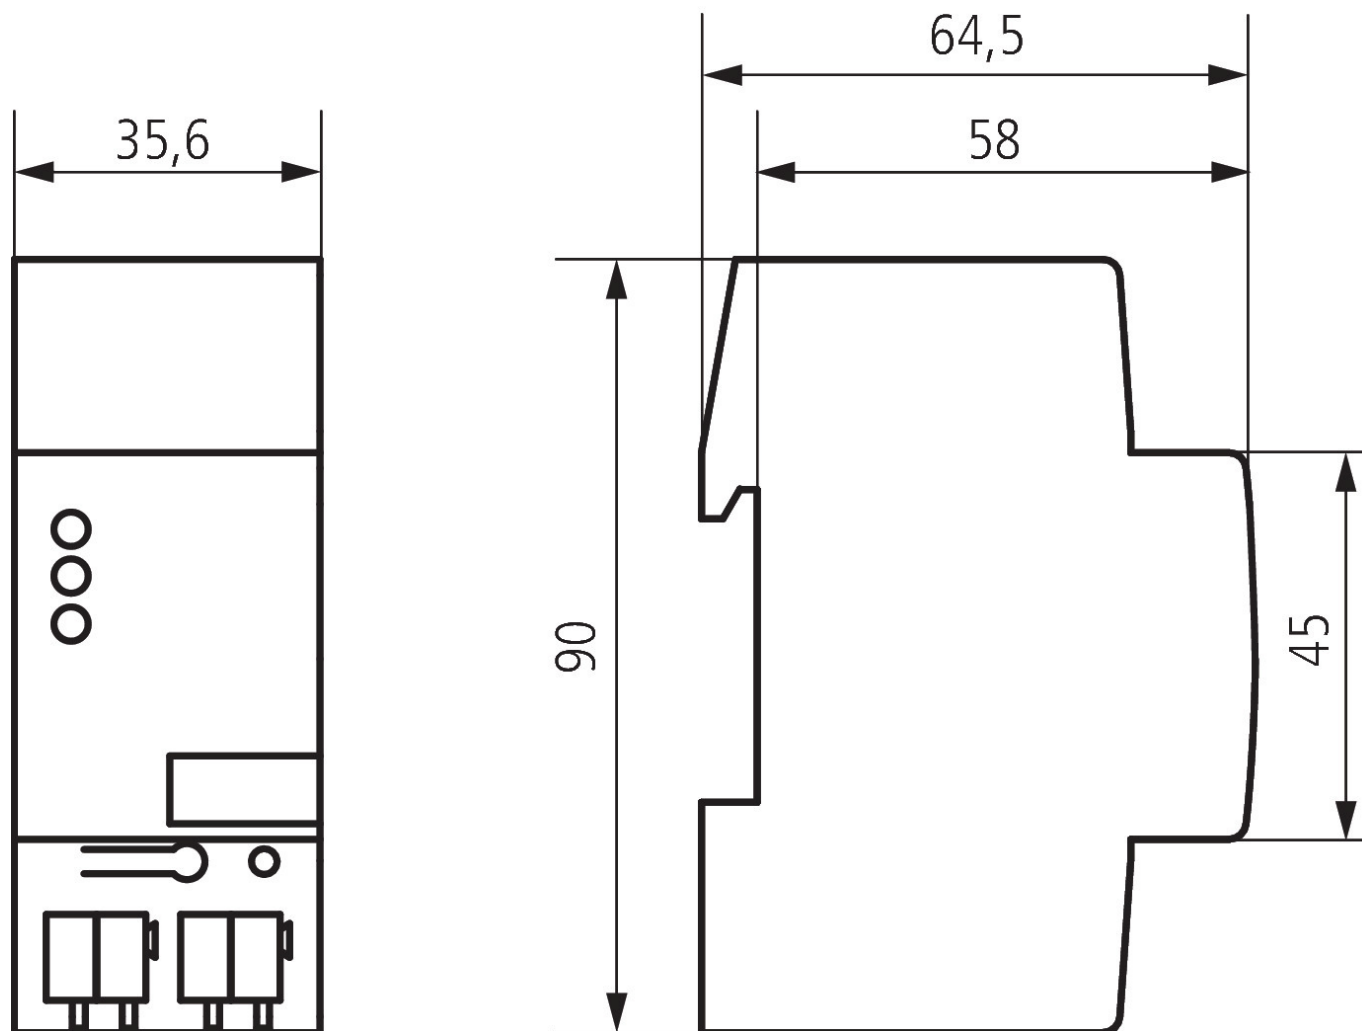

Subject to technical changes and misprints

additional information at: www.theben.de/product/9080048

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

30/06/2026

Page 2 of 2