

LUXORliving PB 4 RF


Item no.: 4800615



Smart Home
Flush-mounted actuators

Description

- LUXORliving push-button module, KNX RF
- 4 touch points
- Integrated temperature sensor
- Can be used universally in many 55 mm switch programmes
- 1-gang or 2-gang rockers required as separate accessories, article numbers 9080026, 9080027
- Secure commissioning and communication through support of KNX Data Secur
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>

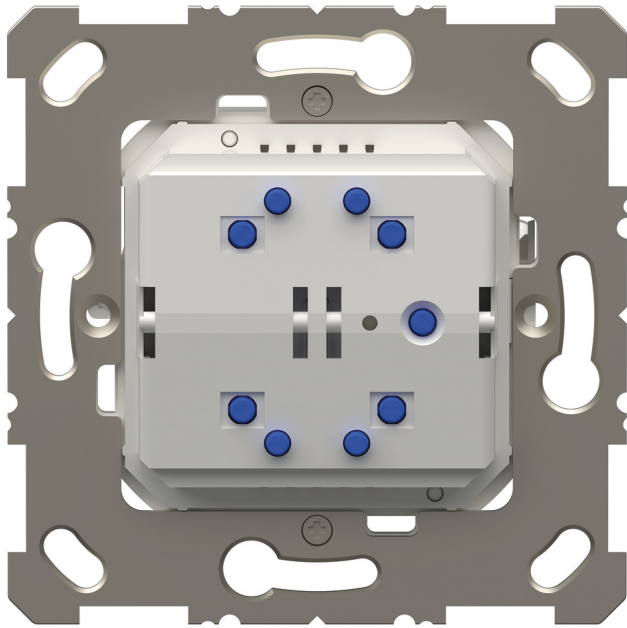

Technical data

LUXORliving PB 4 RF	
Operating voltage	230 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Stand-by consumption	~
Installation type	Flush-mounted

LUXORliving PB 4 RF	
Ambient temperature	-5°C ... 45°C
Protection class	II

Connection example


Subject to technical changes and misprints
additional information at: www.theben.de/product/4800615
The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving PB 4 RF

Item no.: 4800615

theben

Scale drawings

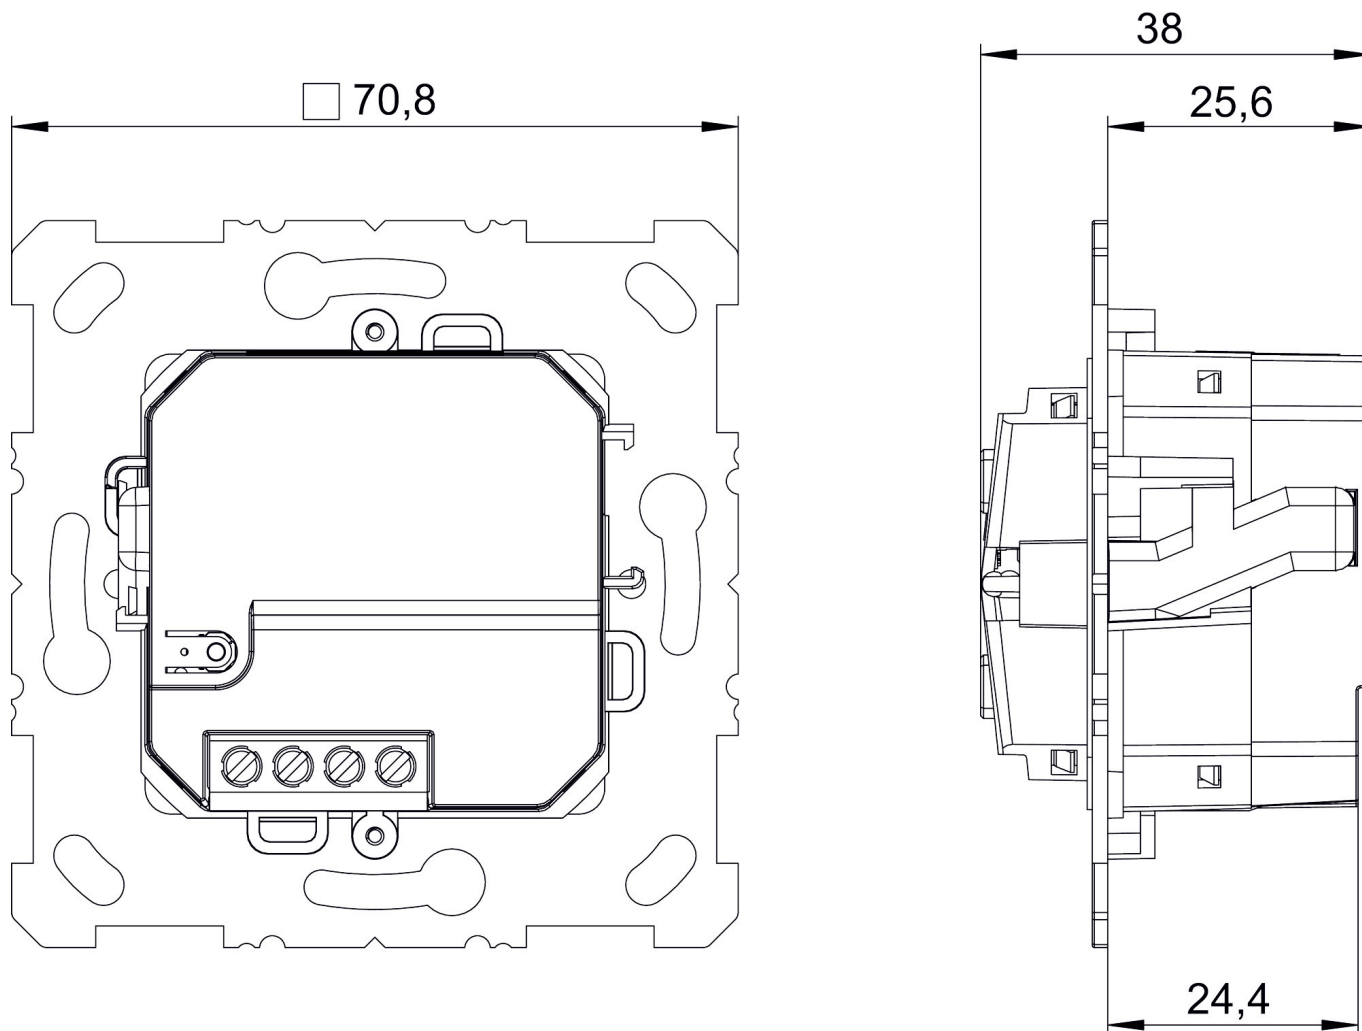

Accessories

Rocker 1-way WH
Item no.: 9080026

Rocker 2-way WH
Item no.: 9080027



Subject to technical changes and misprints

additional information at: www.theben.de/product/4800615

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

28/07/2026
Page 2 of 2