

OKTO 540 BN

Item no.: 5400030

theben

Time and light control Latching relay

Description


- Electronical latching relay
- Comfortable lighting control of one common consumer with several push-buttons possible
- Particularly quiet operation of the installation switch
- Lamps-friendly due to zero-crossing switching
- Ultra-compact design for flexible installation options
- Standby consumption only 0.2 W
- Pre-assembled cables for quick and secure installation
- Dimensions 32.7 x 26.6 x 9.6 mm

Technical data

OKTO 540 BN	
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Stand-by consumption	~0.2 W
Incandescent/halogen lamp load	250 W
LED lamp 2-8 W	150 W
LED lamp > 8 W	150 W

OKTO 540 BN	
Zero-cross switching	✓
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Ambient temperature	-10°C ... 45°C
Protection class	II

Connection example

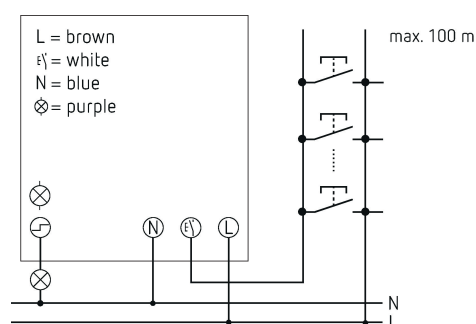

Subject to technical changes and misprints

additional information at: www.theben.de/product/5400030


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

OKTO 540 BN

Item no.: 5400030

theben

Scale drawings

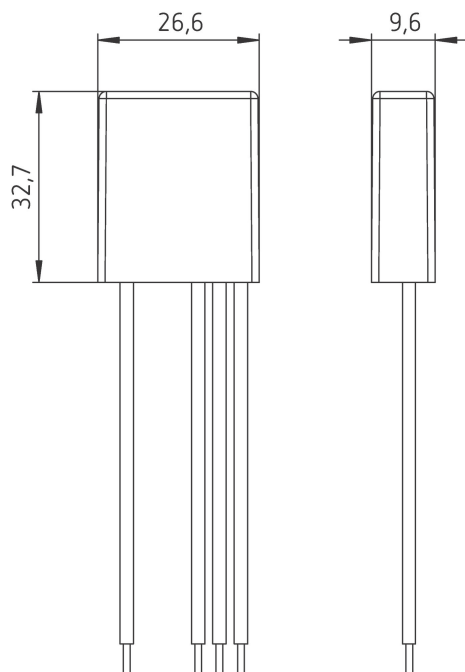

Subject to technical changes and misprints

additional information at: www.theben.de/product/5400030

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

15/06/2026

Page 2 of 2