

Duct/Immersion sensor Temperature

For measuring temperature in duct applications. In connection with a stainless steel or brass thermowell also applicable for pipe applications. IP65 / NEMA 4X rated housing.



Picture may differ from product



Type Overview

Type	Output signal	Probe length	Probe diameter	Accuracy temperature	Measuring current
01DT-1FL	NTC1k8	100 mm	6 mm	$\pm 0.5^{\circ}\text{C}$ @ 25°C [$\pm 0.9^{\circ}\text{F}$ @ 77°F]	$< 0.1\text{ mA}$ @ 25°C [77°F]
01DT-1FN	NTC1k8	150 mm	6 mm	$\pm 0.5^{\circ}\text{C}$ @ 25°C [$\pm 0.9^{\circ}\text{F}$ @ 77°F]	$< 0.1\text{ mA}$ @ 25°C [77°F]
01DT-1FP	NTC1k8	200 mm	6 mm	$\pm 0.5^{\circ}\text{C}$ @ 25°C [$\pm 0.9^{\circ}\text{F}$ @ 77°F]	$< 0.1\text{ mA}$ @ 25°C [77°F]
01DT-1FR	NTC1k8	300 mm	6 mm	$\pm 0.5^{\circ}\text{C}$ @ 25°C [$\pm 0.9^{\circ}\text{F}$ @ 77°F]	$< 0.1\text{ mA}$ @ 25°C [77°F]
01DT-1FT	NTC1k8	450 mm	6 mm	$\pm 0.5^{\circ}\text{C}$ @ 25°C [$\pm 0.9^{\circ}\text{F}$ @ 77°F]	$< 0.1\text{ mA}$ @ 25°C [77°F]

Technical data

	Electrical data	Electrical connection	Pluggable spring loaded terminal block max. 2.5 mm ²
		Cable entry	Cable gland with strain relief $\varnothing 6...8\text{ mm}$
	Functional data	Medium	Air Water
Specification temperature passive	Measuring data	Measured values	Temperature
		Measuring range	$-40...150^{\circ}\text{C}$ [$-40...300^{\circ}\text{F}$]
		Time constant τ (63%) in water pipe	With thermowell A-22P-A.. and thermal contact fluid Typical 7 s with thermowell brass Typical 9 s with thermowell stainless steel
		Time constant τ (63%) in the air duct	Typical 210 s @ 0 m/s Typical 46 s @ 3 m/s
	Safety data	Protection class IEC/EN	III, Protective Extra-Low Voltage (PELV)
		Power source UL	Class 2 Supply
		Degree of protection IEC/EN	IP65
		Degree of protection NEMA/UL	NEMA 4X
		EU Conformity	CE Marking
		Certification IEC/EN	IEC/EN 60730-1
		Quality Standard	ISO 9001
		UL Approval	cULus acc. to UL60730-1A/-2-9, CAN/CSA E60730-1/-2-9
		Type of action	Type 1
		Rated impulse voltage supply	0.8 kV
		Pollution degree	3

Technical data

Safety data	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-35...50°C [-30...120°F]
	Fluid temperature	-50...150°C [-60...300°F]
	Housing surface temperature	Max. 90°C [195°F]
Materials	Housing	Cover: PC, orange Bottom: PC, orange Seal: NBR70, black UV resistant
	Cable gland	Plug Adapter: PA66, black Nut: PA6, black
	Probe material	V4A (1.4404)

Safety notes



This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application. Unauthorised modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten humans, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.

The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Remarks

General remarks concerning sensors	Due to self-heating with 2 wire passive sensors, the supply wire current affects the measurement accuracy. So the supply current should not be higher than the measuring current values specified in this data sheet.
	When using lengthy connecting cables (depending on the cross section used), the cable resistance must be taken into account. The lower the impedance of the sensor used, the greater the effect of the line resistance on the measurement, because it generates an offset.

Parts included

Description	Type
Mounting clip, with screws and adhesive foil	A-22D-A11

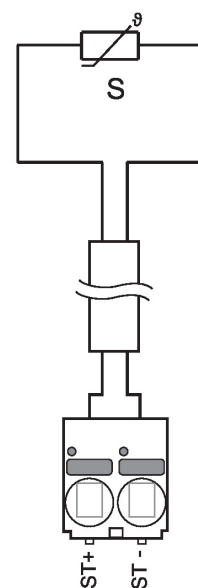
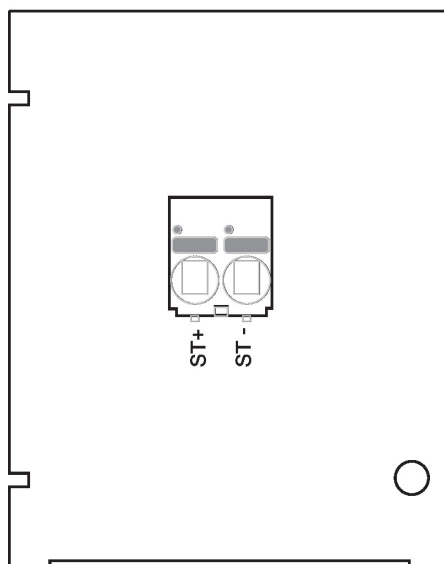
Accessories

Optional accessories	Description	Type
	Mounting plate S housing	A-22D-A09
Optional accessories air	Connection adapter flex conduit, M20x1.5, for cable gland 1x 6 mm, Multipack 10 pcs.	A-22G-A01.1
	Description	Type
	Mounting flange for sensor probe 6 mm, up to max. 120°C [248°F], Plastic	A-22D-A03
	Mounting flange for sensor probe 6 mm, up to max. 120°C [248°F], Multipack 50 pcs., Plastic	A-22D-A03.1
Recommended accessories water	Mounting flange for sensor probe 6 mm, up to max. 260°C, Brass	A-22D-A05
	Description	Type
	Thermowell Stainless steel, 100 mm, G 1/2", SW27	A-22P-A08
	Thermowell Brass, 100 mm, R 1/2", SW22	A-22P-A20
	Thermal contact fluid	A-22P-A44
	Compression fitting, G 1/4" (external thread) for 6 mm, with cutting ring	A-22P-A45
	Cold barrier, L 50 mm, for thermowell A-22P-A..	A-22P-A51

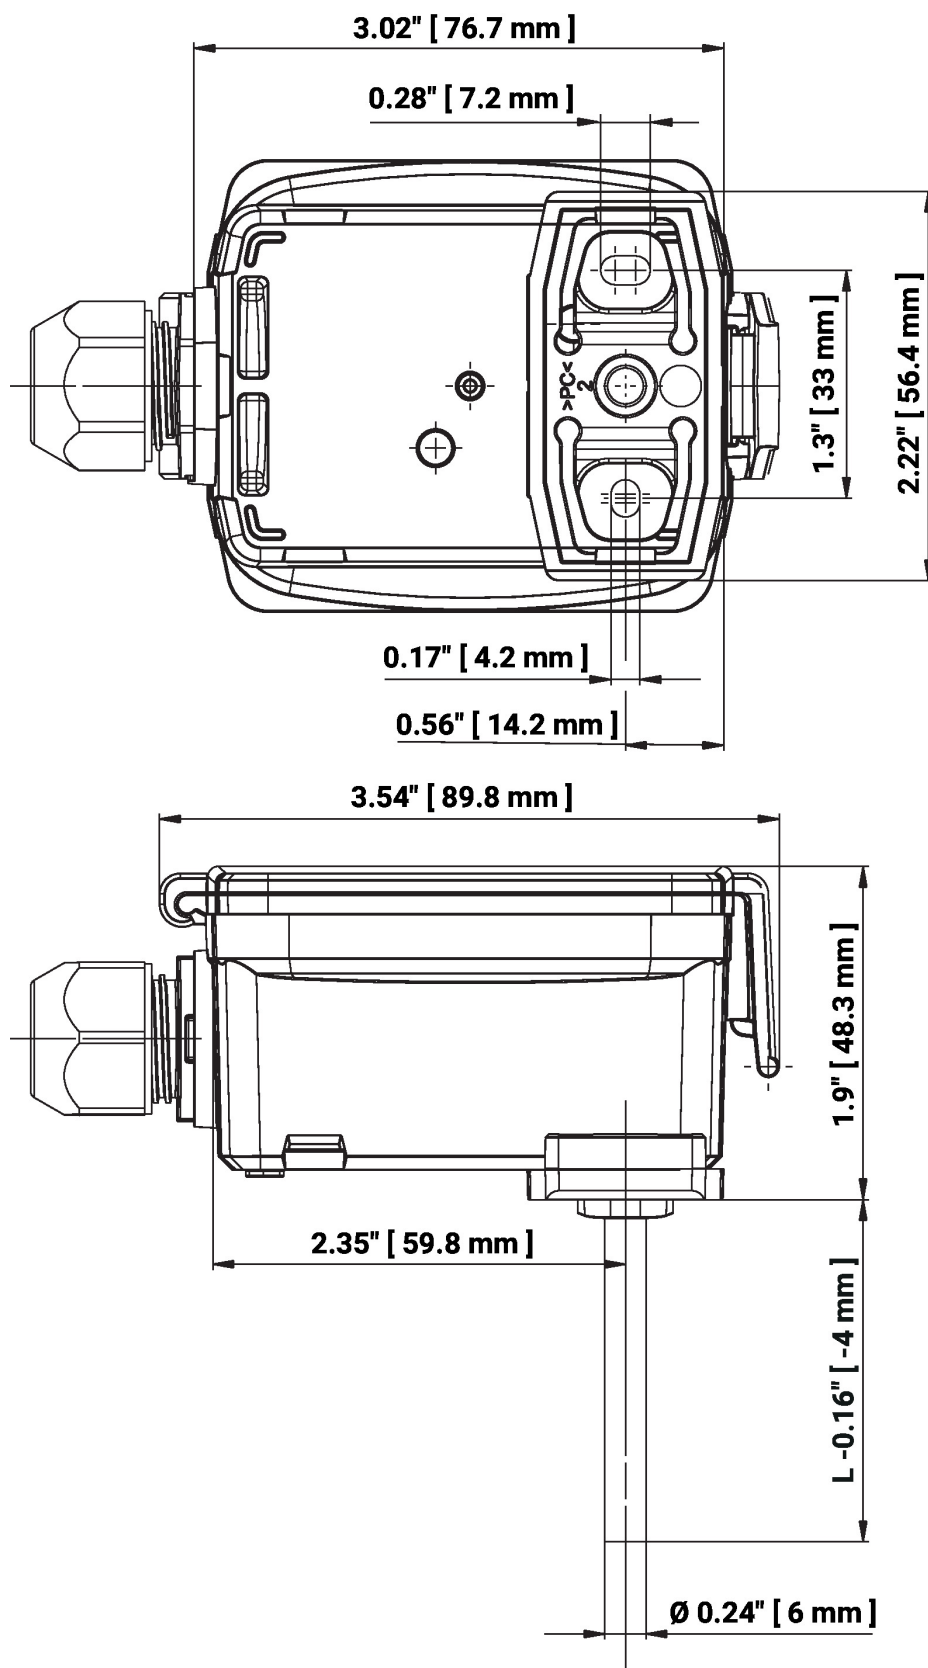
Accessories
Description
Type

Thermowell Stainless steel, 50 mm, G 1/2", SW27
 Thermowell Brass, 50 mm, R 1/2", SW22
 Adapter for Siemens thermowell
 Thermowell Stainless steel, 150 mm, G 1/2", SW27
 Thermowell Brass, 150 mm, R 1/2", SW22
 Thermowell Stainless steel, 200 mm, G 1/2", SW27
 Thermowell Brass, 200 mm, R 1/2", SW22
 Thermowell Stainless steel, 300 mm, G 1/2", SW27
 Thermowell Brass, 300 mm, R 1/2", SW22
 Thermowell Stainless steel, 250 mm, G 1/2", SW27
 Thermowell Brass, 250 mm, R 1/2", SW22
 Thermowell Stainless steel, 450 mm, G 1/2", SW27
 Thermowell Brass, 450 mm, R 1/2", SW22

A-22P-A06
 A-22P-A18
 A-22P-A53
 A-22P-A10
 A-22P-A22
 A-22P-A12
 A-22P-A24
 A-22P-A14
 A-22P-A26
 A-22P-A29
 A-22P-A30
 A-22P-A16
 A-22P-A28

Wiring diagram


Dimensions



L = Probe length

Type	Probe length	Weight
01DT-1FL	100 mm	0.12 kg
01DT-1FN	150 mm	0.13 kg
01DT-1FP	200 mm	0.13 kg
01DT-1FR	300 mm	0.14 kg

Dimensions

Type	Probe length	Weight
01DT-1FT	450 mm	0.15 kg

Further documentation

- Installation instructions
- Resistance characteristics
- Sensor length calculator