



A2 系列翼型 EC 后向离心风机 Φ560

EC Centrifugal Fan-A2 Airfoil

Backward Curved Φ560

版本号/Version number: V1

2024-12-30

额定数据 Nominal data

型号 Type	EC180/85D3G01-B560/190A2-02-Z	
成品品号 Finalized product quantity	/	
相数 Phase	3~	
额定电压 Rated voltage	VAC	400
电压范围 Rated voltage range	VAC	380 ~ 480
频率 Frequency	Hz	50/60
转速 Speed (rpm)	min ⁻¹	1540
功率 Power consumption	W	3600
电流 Current	A	5.6
最低环境温度 Min. ambient temperature	°C	-25
最高环境温度 Max. ambient temperature	°C	50


ErP 能效数据 ErP Energy efficiency data

		实际 Actual	规定 2015 Req. 2015
整体效率 η_{es} Overall efficiency	%	70.2	57.4
测量类别 Measurement category		A	
效率类别 Efficiency category		静态 Static	
效率等级 N Efficiency grade N		74.8	62
转速调节 Variable speed drive		是 Yes	

*注：此文件仅供选型参考，如您有任何疑问或需要进一步的技术支持，请随时与我们联系。

Please note that this document is intended solely for selection reference. Should you have any inquiries or require additional technical support, do not hesitate to reach out to us.

特性曲线及数据 Characteristic curve and data

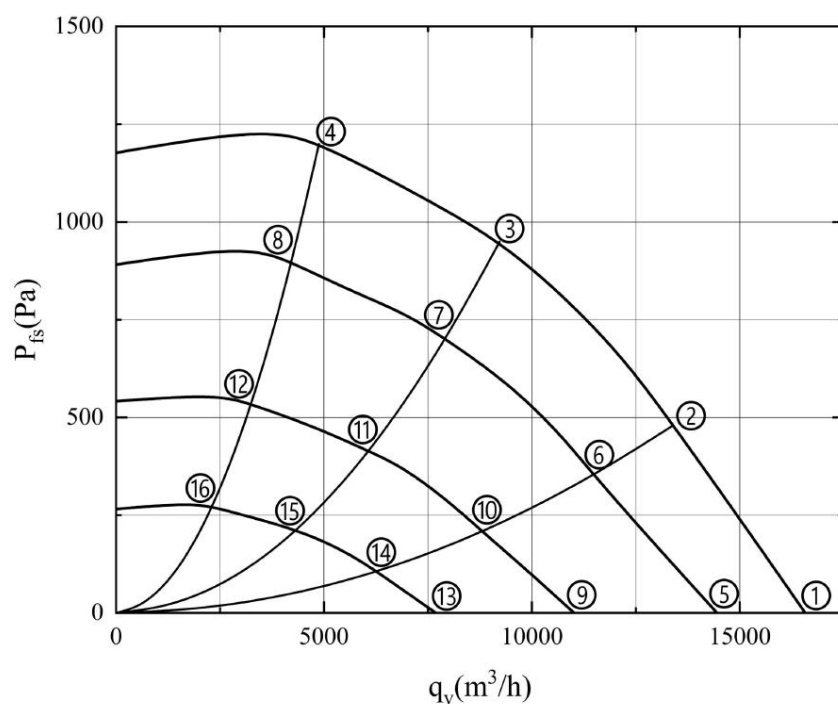


	电压	频率	转速	功率	电流	噪声	风量	静压	风量
	Rated voltage	Frequency	Speed	Power	Curren	Noise	Air flow	Static pressure	Air flow
	U(V)	f(Hz)	n(r/min)	P _{ed} (W)	I(A)	L _p (dB(A))	q _v (m³/h)	p _{fs} (Pa)	q _v (cfm)
1	400	50	1540	2421	3.7	83	16572	0	9754
2	400	50	1540	3187	4.9	79	13400	480	7887
3	400	50	1540	3600	5.6	76	9226	950	5430
4	400	50	1540	2957	4.5	78	4878	1200	2871
5	400	50	1340	1669	2.6	79	14451	0	8506
6	400	50	1340	2080	3.2	76	11500	350	6769
7	400	50	1340	2436	3.7	73	7912	702	4657
8	400	50	1340	2019	3.1	74	4201	898	2473
9	400	50	1040	805	1.3	73	11011	0	6481
10	400	50	1040	1026	1.6	70	8814	208	5188
11	400	50	1040	1158	1.8	67	6049	415	3560
12	400	50	1040	914	1.5	68	2652	552	1561
13	400	50	750	294	0.4	72	7687	0	4524
14	400	50	750	387	0.6	64	6280	105	3696
15	400	50	750	441	0.7	64	4313	212	2539
16	400	50	750	359	0.5	63	2293	272	1349


技术说明 Technical description

净量 Net weight		66kg	
毛重 Gross weight		70kg	
包装尺寸 Package size		83cm*83cm*61cm	
叶轮型号 Impeller model		560	
电机型号 Motor model		180	
转子表面 Rotor surface		黑色喷漆 Painted black	
叶轮材料 Impeller material		铝制 Sheet aluminum	
面板材料 Support plate material		钢制，镀锌 Sheet steel, galvanized	
支架材料 Support bracket material		钢制，黑色喷漆 Sheet steel, painted black	
导风圈材料 Inlet nozzle material		钢制，镀锌 Sheet steel, galvanized	
叶片数量 Number of blades		5	
旋转方向 Direction of rotation		CW（从转子端看）Viewed toward rotor	
防护等级 Degree of protection		IP54	
安装方式 Installation type		轴水平安装或转子向下安装 Shaft horizontal or rotor downward installation	
绝缘等级 Insulation class		F	
储存环境温度 Storage temperature		-40℃ ~ +80℃	
运行模式 Mode		S1	
振动 Vibration		≤ 4.6mm/s	
动平衡 Dynamic balance		G4.0	
轴承 Bearing		滚珠球轴承 Ball bearing	
风机寿命 Life time	时 Hour	40,000	额定电压，风机全速运转，40℃环境 At nominal voltage, running at full speed, environment temperature 40℃
电磁兼容 EMC		工业级 Industrial	
启动电压 Starting voltage		1V	
电源线对地耐电压 Power line to ground withstand voltage		DC2500V/1min	
控制特点 Control characteristics		0-10 VDC / PWM 控制输入端 0-10 VDC / PWM speed regulation	
		输出端 10VDC，最大 3.5mA Output terminal +10VDC, 3.5mA max	
		集成的 PID 控制器 Integrated PID controller	
		电机软件过热保护 Motor software overheat protection	
		软启动 Soft Start	
		RS485 MODBUS-RTU	
		报警继电器 Alarm relay	
		低电压/相故障检测 Under volt/Phase failure protection	

产品图纸 Product drawing

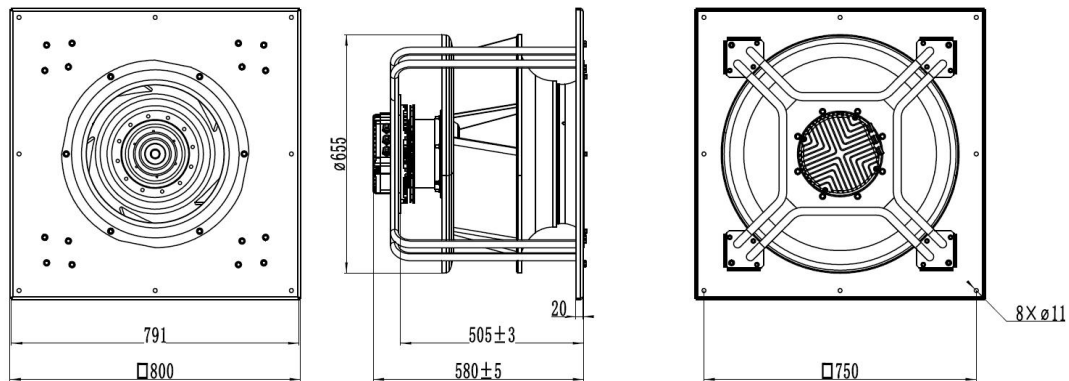

线路图 Connection diagram

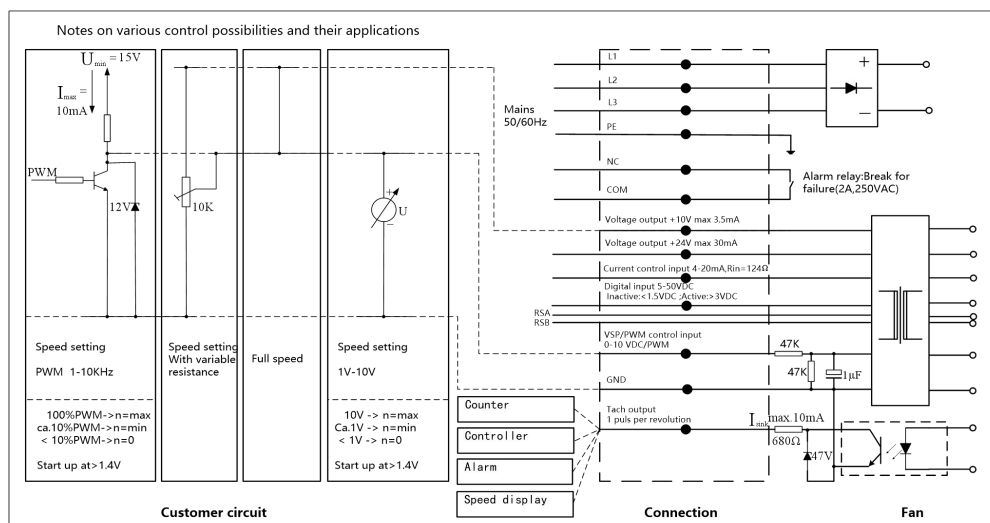

Terminal	NO.	Connection	Function
KL1	1	L1	电源相线，电压范围见铭牌 Power supply phase wire, voltage range, show on the nameplate
	2	L2	电源相线，电压范围见铭牌 Power supply phase wire, voltage range, show on the nameplate
	3	L3	电源相线，电压范围见铭牌 Power supply phase wire, voltage range, show on the nameplate
	4	PE	保护接地 Protective earth
KL2	1	NC	状态继电器，浮动状态触点，故障或断电后断开 Status relay, floating status contact, break for failure
	2	COM	状态继电器，浮动状态触点，触点额定值250VAC/2A (AC1)最小10mA Status relay, floating status contact, contact rating 250VAC/2A (AC1)min.10mA
KL3	1	+10V/max. 3.5mA	电压输出，给外部设备提供电源 Voltage output, power supply for ext. device
	2	+24V/max. 30mA	电压输出，给外部设备提供电源 Voltage output, power supply for ext. device
	3	4-20mA	模拟量输入，测量值4~20mA，内阻124欧 Analog input, measured value 4-20mA, Rin=124ohm
	4	DIN	数字量输入5~50VDC激活设备 有效电平：电压值>3VDC；无效电平：电压值<1.5VDC Digital input 5-50VDC activate electronics Active: voltage>3VDC; Inactive: voltage<1.5VDC
	5,7	RSA	MODBUS的RS485接口A RS485 interface for MODBUS, RSA
	6,8	RSB	MODBUS的RS485接口B RS485 interface for MODBUS, RSB
	9	0-10V/PWM	控制0~10V或PWM输入，内部阻抗为100K Control input 0-10V or PWM, internal impedance 100K
	10	GND	控制接口部分参考地 Reference ground for control interface
	11	Tacho	输出：1脉冲/每转 Tach output: 1 pulse/revolution