



GAMMA INSTABUS WALL SWITCH QUADRUPLE,
WITH LED AND IR RECEIVER UP 287/5 DELTA STYLE
PLATINUM METALLIC

Technical data:		
Material		thermoplastic
Appearance		mat
Color		platinum
Surface processing		others
Material / of the enclosure		plastic
Product component		
• thermostat		No
• Lettering field		No
Bus system / can be used / EIB/KNX		Yes
Bus system / usable / RF bus system		Yes
Bus system / usable / Powernet bus system		No
Bus system / usable / LON bus system		No
Bus system / others / suitable for use		Without
• integrated / Bus coupling		No
• display		No
Type of mounting		flush mounted
Type of display / LED		Yes
Protection class IP		IP20
Suitability for interaction / IR sensor		Yes

Product feature / anti-theft/dismantling	No
Number of actuation points	8

Certificates/approvals:

General Product
Approval

Declaration of Conformity



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5WG1287-2DB45/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5WG1287-2DB45

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

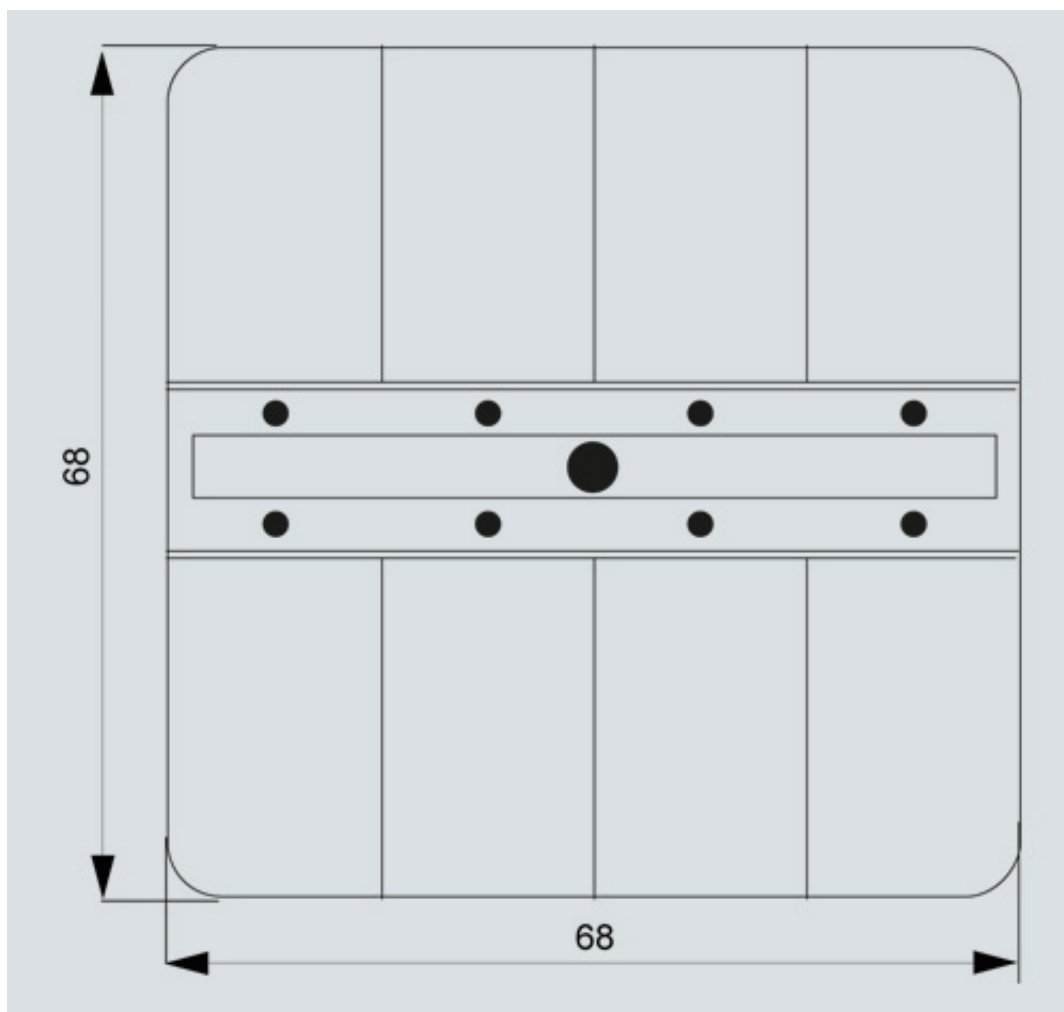

last change:

Jul 1, 2013